


KML2812

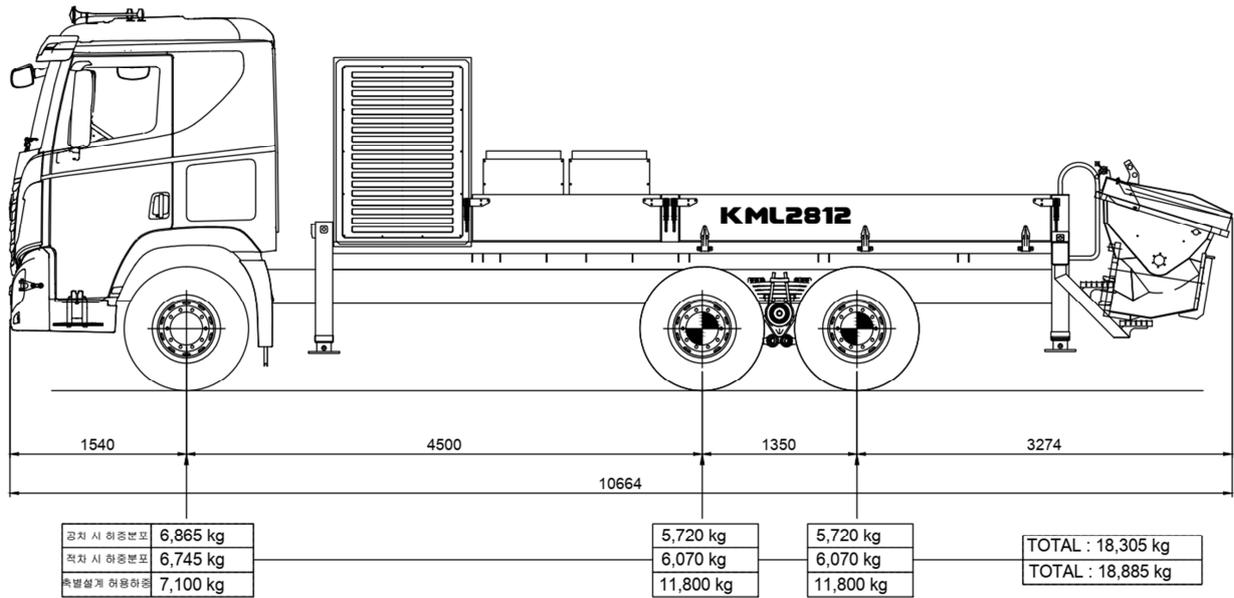

■ Pump specifications		■ Performance diagram	
Maximum output	112 [m³/h]		
Concrete pressure	285 [bar]		
Stroke per minute	27		
Main cylinder	Ø160/ Ø90×2100ST		
Concrete cylinder	Ø200×2100ST		
S-tube	Ø200×Ø150		
Hopper capacity	0.6 m³		
Truck RPM	1550 rpm		
Hydraulic pump	Rexroth 260DT		
Engine / HP	CAT-C7.1 / 300HP		
Engine RPM	1700 rpm		
Hydraulic pump (Engine)	Rexroth 260S		
Max. aggregate size	40 mm		
Vertical distance	405 [M]		
Horizontal distance	700 [M]		

- ⊙ Maximum theoretical values listed.
- ⊙ Photos and drawings are for illustrative purpose only
- ⊙ Dimension will vary with different truck makers, models and specifications
- ⊙ Right to make technical amendments reserved